1,000 L IBC AND OUTLET FITTINGS

D01-IBC-FT-001

Product data sheet · PE tanks

1,000 L IBC for the storage and transport of liquids, with an HDPE inner tank in a galvanised steel frame on a plastic pallet, and its BSP female-threaded outlet fittings.



Technical data

Food contact	Suitable
Capacity	1,000 L
Inner container	Blow-moulded HDPE
Frame	Welded, galvanised steel tubes
Pallet	Plastic
External dimensions (L × W × H)	1200 × 1000 × 1160 mm
Filling opening	NW 150
Outlet valve	NW 50
Weight	53.4 kg
UN approval	Optional

Description

The IBC is used for the storage and transport of liquids. Its 1,000 L inner tank, in blow-moulded HDPE, is held by a frame of welded, galvanised steel tubes, mounted on a plastic pallet.

For the transport of dangerous goods, the IBC is available with optional UN approval.

Advantages

- Low tare weight variation.
- Weather-resistant.
- Reusable.

Accessories

Adapter fittings for the IBC outlet, BSP female-threaded, supplied with 2 flat seals.

1,000 L IBC AND OUTLET FITTINGS

D01-IBC-FT-001

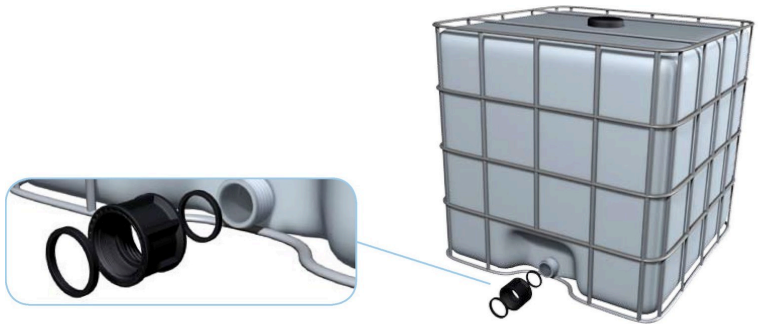

Adapter fitting and IBC

Adapter fittings (BSP female-threaded outlet)

Code	Connection
RACIBC-0100	1" F
RACIBC-0112	1" 1/2 F
RACIBC-0200	2" F

Product codes : IBC-1000, RACIBC-0100, RACIBC-0112, RACIBC-0200